

CARDONE ProTech

Supporting Today's Professional Technician



81-158PB Replacement Pulse Board Park Problem

Application:

CARDONE Wiper Motor Pulse Board part number 81-158PB. See catalog for proper vehicle applications.

Problem:


Wipers will not park after replacing Pulse Board.

Cause:

Contact arms on Pulse Board may not be contacting Wiper Motor. Packing material or movement during shipping may have bent contacts.

Solution:

Check position of contact arms before installation. Contacts should be approximately 1 inch (25 mm) above circuit board (see picture). Correct contact position ensures proper Wiper Motor parking function.

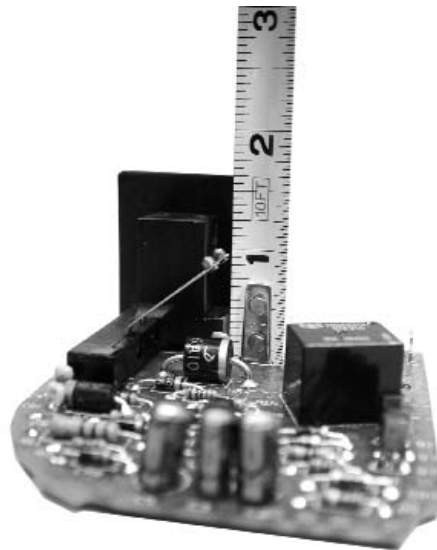**Note:**


Refer to PROTECH PT 40-0003 and PT 40-0004 for additional troubleshooting tests for Wiper Motors and Pulse Boards.

For other ProTech publications, visit www.cardone.com
CARDONE Industries, Inc. • 5501 Whitaker Ave. • Philadelphia, PA 19124-1799

Window Lift Motors

Re-engineered to perform better than new

CARDONE's Motors coverage includes:



- Window Lift Gear Kits
- Window Lift Motors
- Wiper Motors

O.E. Gaskets - CARDONE, through extensive engineering research, has found that O.E. gaskets are often weak and are the cause of motor failure. CARDONE remanufactures all of its Window Lift Motors with a top quality gasket as a replacement for the O.E. gasket. The strength of the gasket ensures the unit will be protected in all situations. This saves the customer time and money from unnecessary repairs.



- 12-month / 18,000 mile warranty
- Contact your local auto parts store or visit our web site, **www.cardone.com**, for more information on this and other CARDONE products today!



CARDONE[®]