




## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### INTAKE MANIFOLD GASKET

**CLEAN MATING SURFACES** of all foreign material including old gaskets. RTV and oil. You may wish to use a degreaser.

**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly in several places on the cylinder heads. Mount gasket(s) on cylinder head(s). **Allow time for adhesive to set.** Test for slippage with light pressure. If gasket moves, allow more time.



**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly to cylinder block. Mount end seals. **Allow time for adhesive to set.** Test for slippage with light pressure. If seals moves, allow more time.

**PRIOR TO INSTALLING INTAKE MANIFOLD GASKET** apply a small dab of silicone sealer, such as RTV Black, to the 4 corners where the end seals meet with the cylinder heads. **IMMEDIATELY PROCEED** to the next step, as RTV normally sets up in 10-15 minutes.

**ATTACH AND ALIGN GASKET.**

**REINSTALL INTAKE MANIFOLD TO ENGINE.** Torque securely to OEM specifications.

© 2000 Federal-Mogul Corp.  
Form No. I-458 (Rev.10/00)

Printed in U.S.A.




## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### INTAKE MANIFOLD GASKET

**CLEAN MATING SURFACES** of all foreign material including old gaskets. RTV and oil. You may wish to use a degreaser.

**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly in several places on the cylinder heads. Mount gasket(s) on cylinder head(s). **Allow time for adhesive to set.** Test for slippage with light pressure. If gasket moves, allow more time.



**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly to cylinder block. Mount end seals. **Allow time for adhesive to set.** Test for slippage with light pressure. If seals moves, allow more time.

**PRIOR TO INSTALLING INTAKE MANIFOLD GASKET** apply a small dab of silicone sealer, such as RTV Black, to the 4 corners where the end seals meet with the cylinder heads. **IMMEDIATELY PROCEED** to the next step, as RTV normally sets up in 10-15 minutes.

**ATTACH AND ALIGN GASKET.**

**REINSTALL INTAKE MANIFOLD TO ENGINE.** Torque securely to OEM specifications.

© 2000 Federal-Mogul Corp.  
Form No. I-458 (Rev.10/00)

Printed in U.S.A.




## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### INTAKE MANIFOLD GASKET

**CLEAN MATING SURFACES** of all foreign material including old gaskets. RTV and oil. You may wish to use a degreaser.

**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly in several places on the cylinder heads. Mount gasket(s) on cylinder head(s). **Allow time for adhesive to set.** Test for slippage with light pressure. If gasket moves, allow more time.



**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly to cylinder block. Mount end seals. **Allow time for adhesive to set.** Test for slippage with light pressure. If seals moves, allow more time.

**PRIOR TO INSTALLING INTAKE MANIFOLD GASKET** apply a small dab of silicone sealer, such as RTV Black, to the 4 corners where the end seals meet with the cylinder heads. **IMMEDIATELY PROCEED** to the next step, as RTV normally sets up in 10-15 minutes.

**ATTACH AND ALIGN GASKET.**

**REINSTALL INTAKE MANIFOLD TO ENGINE.** Torque securely to OEM specifications.

© 2000 Federal-Mogul Corp.  
Form No. I-458 (Rev.10/00)

Printed in U.S.A.




## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### INTAKE MANIFOLD GASKET

**CLEAN MATING SURFACES** of all foreign material including old gaskets. RTV and oil. You may wish to use a degreaser.

**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly in several places on the cylinder heads. Mount gasket(s) on cylinder head(s). **Allow time for adhesive to set.** Test for slippage with light pressure. If gasket moves, allow more time.

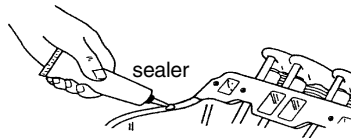

**ATTACH AND ALIGN GASKET(S) TO CYLINDER HEAD(S).** Apply quick-drying adhesive, sparingly to cylinder block. Mount end seals. **Allow time for adhesive to set.** Test for slippage with light pressure. If seals moves, allow more time.

**PRIOR TO INSTALLING INTAKE MANIFOLD GASKET** apply a small dab of silicone sealer, such as RTV Black, to the 4 corners where the end seals meet with the cylinder heads. **IMMEDIATELY PROCEED** to the next step, as RTV normally sets up in 10-15 minutes.

**ATTACH AND ALIGN GASKET.**

**REINSTALL INTAKE MANIFOLD TO ENGINE.** Torque securely to OEM specifications.

© 2000 Federal-Mogul Corp.  
Form No. I-458 (Rev.10/00)

Printed in U.S.A.