



## FEL-PRO INSTALLATION TIPS

### INTAKE MANIFOLD GASKET


**IMPORTANT:** THESE GASKETS UTILIZE A RUBBER PUSH ROD INSTALLATION GUIDE PIN INSTEAD OF THE OE PLASTIC FORK. SIMPLY PLACE THE PUSH ROD ON THE VALVE LIFTER AND LET IT REST AGAINST THE RUBBER GUIDE PINS, THIS PROPERLY ALIGNS THE PUSH ROD WITH THE ROCKER ARM. THESE GUIDES ARE FOR INITIAL INSTALLATION ONLY, AND THEY ARE NON-FUNCTIONAL DURING ENGINE OPERATION.

**IMPORTANT!!** Upper Metal Alignment Pin must line up with hole in cylinder head. If it does not, do not install the gasket as this is an indicator that wrong gasket is being used for that particular cylinder head. Ensure alignment pin holes in cylinder heads do not contain broken pins or other debris.

**CLEAN MATING SURFACES** of all foreign material and oil.

**EXAMINE COOLANT PORT AREA OF MANIFOLD AND HEADS FOR PITTING.** If pitting is excessive, resurface or replace castings. Although some mechanics fill in the pits with epoxy, we recommend refinishing or replacing castings. Do not use RTV silicone to fill in the pits!

**INSTALL SIDE RAIL GASKETS DRY WITHOUT SEALERS.**

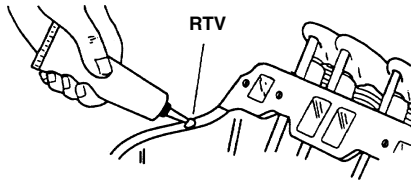

**CREATE MANIFOLD END SEALS** by applying a 1/4" dia. bead of RTV across front and rear ends of the block. Install manifold while RTV is still wet.

**INSTALL NEW BOLTS** with pre-applied sealer or wire brush old bolts and apply sealer.

- Continued -

**TIGHTEN BOLTS** slowly by hand, two at a time, across from each other, to seat manifold down evenly.

**TORQUE BOLTS.** Starting with the center bolts, and using a crisscross pattern, torque all bolts to 62 in. lbs, and then 115 in. lbs. Torque the 4 outer bolts to 18 ft. lbs.

### VALVE COVER GASKETS

To effectively seal this sophisticated engine application, FEL-PRO has included two PERMA-DRY molded rubber valve cover gaskets. For this application removal of the valve covers is necessary to perform a lower intake manifold gasket repair.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.

**ATTACH AND ALIGN GASKET.**

**IMPORTANT:** The molded rubber silicone gaskets must be installed **DRY** without any chemical adhesive.

**PRESS GASKET IN VALVE COVER.**

**REINSTALL COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

© 2007 Federal-Mogul Corporation  
Form No. I-2045 (Rev. 09/07)

Printed in U.S.A.



## FEL-PRO INSTALLATION TIPS

### INTAKE MANIFOLD GASKET


**IMPORTANT:** THESE GASKETS UTILIZE A RUBBER PUSH ROD INSTALLATION GUIDE PIN INSTEAD OF THE OE PLASTIC FORK. SIMPLY PLACE THE PUSH ROD ON THE VALVE LIFTER AND LET IT REST AGAINST THE RUBBER GUIDE PINS, THIS PROPERLY ALIGNS THE PUSH ROD WITH THE ROCKER ARM. THESE GUIDES ARE FOR INITIAL INSTALLATION ONLY, AND THEY ARE NON-FUNCTIONAL DURING ENGINE OPERATION.

**IMPORTANT!!** Upper Metal Alignment Pin must line up with hole in cylinder head. If it does not, do not install the gasket as this is an indicator that wrong gasket is being used for that particular cylinder head. Ensure alignment pin holes in cylinder heads do not contain broken pins or other debris.

**CLEAN MATING SURFACES** of all foreign material and oil.

**EXAMINE COOLANT PORT AREA OF MANIFOLD AND HEADS FOR PITTING.** If pitting is excessive, resurface or replace castings. Although some mechanics fill in the pits with epoxy, we recommend refinishing or replacing castings. Do not use RTV silicone to fill in the pits!

**INSTALL SIDE RAIL GASKETS DRY WITHOUT SEALERS.**

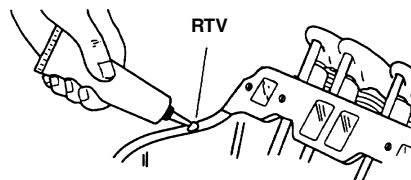

**CREATE MANIFOLD END SEALS** by applying a 1/4" dia. bead of RTV across front and rear ends of the block. Install manifold while RTV is still wet.

**INSTALL NEW BOLTS** with pre-applied sealer or wire brush old bolts and apply sealer.

- Continued -

**TIGHTEN BOLTS** slowly by hand, two at a time, across from each other, to seat manifold down evenly.

**TORQUE BOLTS.** Starting with the center bolts, and using a crisscross pattern, torque all bolts to 62 in. lbs, and then 115 in. lbs. Torque the 4 outer bolts to 18 ft. lbs.

### VALVE COVER GASKETS

To effectively seal this sophisticated engine application, FEL-PRO has included two PERMA-DRY molded rubber valve cover gaskets. For this application removal of the valve covers is necessary to perform a lower intake manifold gasket repair.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.

**ATTACH AND ALIGN GASKET.**

**IMPORTANT:** The molded rubber silicone gaskets must be installed **DRY** without any chemical adhesive.

**PRESS GASKET IN VALVE COVER.**

**REINSTALL COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

© 2007 Federal-Mogul Corporation  
Form No. I-2045 (Rev. 09/07)

Printed in U.S.A.



## FEL-PRO INSTALLATION TIPS

### INTAKE MANIFOLD GASKET


**IMPORTANT:** THESE GASKETS UTILIZE A RUBBER PUSH ROD INSTALLATION GUIDE PIN INSTEAD OF THE OE PLASTIC FORK. SIMPLY PLACE THE PUSH ROD ON THE VALVE LIFTER AND LET IT REST AGAINST THE RUBBER GUIDE PINS, THIS PROPERLY ALIGNS THE PUSH ROD WITH THE ROCKER ARM. THESE GUIDES ARE FOR INITIAL INSTALLATION ONLY, AND THEY ARE NON-FUNCTIONAL DURING ENGINE OPERATION.

**IMPORTANT!!** Upper Metal Alignment Pin must line up with hole in cylinder head. If it does not, do not install the gasket as this is an indicator that wrong gasket is being used for that particular cylinder head. Ensure alignment pin holes in cylinder heads do not contain broken pins or other debris.

**CLEAN MATING SURFACES** of all foreign material and oil.

**EXAMINE COOLANT PORT AREA OF MANIFOLD AND HEADS FOR PITTING.** If pitting is excessive, resurface or replace castings. Although some mechanics fill in the pits with epoxy, we recommend refinishing or replacing castings. Do not use RTV silicone to fill in the pits!

**INSTALL SIDE RAIL GASKETS DRY WITHOUT SEALERS.**

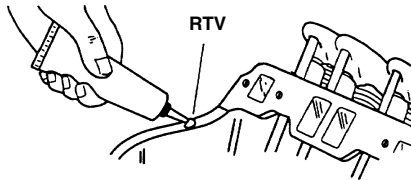

**CREATE MANIFOLD END SEALS** by applying a 1/4" dia. bead of RTV across front and rear ends of the block. Install manifold while RTV is still wet.

**INSTALL NEW BOLTS** with pre-applied sealer or wire brush old bolts and apply sealer.

- Continued -

**TIGHTEN BOLTS** slowly by hand, two at a time, across from each other, to seat manifold down evenly.

**TORQUE BOLTS.** Starting with the center bolts, and using a crisscross pattern, torque all bolts to 62 in. lbs, and then 115 in. lbs. Torque the 4 outer bolts to 18 ft. lbs.

### VALVE COVER GASKETS

To effectively seal this sophisticated engine application, FEL-PRO has included two PERMA-DRY molded rubber valve cover gaskets. For this application removal of the valve covers is necessary to perform a lower intake manifold gasket repair.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.

**ATTACH AND ALIGN GASKET.**

**IMPORTANT:** The molded rubber silicone gaskets must be installed **DRY** without any chemical adhesive.

**PRESS GASKET IN VALVE COVER.**

**REINSTALL COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

© 2007 Federal-Mogul Corporation  
Form No. I-2045 (Rev. 09/07)

Printed in U.S.A.



## FEL-PRO INSTALLATION TIPS

### INTAKE MANIFOLD GASKET


**IMPORTANT:** THESE GASKETS UTILIZE A RUBBER PUSH ROD INSTALLATION GUIDE PIN INSTEAD OF THE OE PLASTIC FORK. SIMPLY PLACE THE PUSH ROD ON THE VALVE LIFTER AND LET IT REST AGAINST THE RUBBER GUIDE PINS, THIS PROPERLY ALIGNS THE PUSH ROD WITH THE ROCKER ARM. THESE GUIDES ARE FOR INITIAL INSTALLATION ONLY, AND THEY ARE NON-FUNCTIONAL DURING ENGINE OPERATION.

**IMPORTANT!!** Upper Metal Alignment Pin must line up with hole in cylinder head. If it does not, do not install the gasket as this is an indicator that wrong gasket is being used for that particular cylinder head. Ensure alignment pin holes in cylinder heads do not contain broken pins or other debris.

**CLEAN MATING SURFACES** of all foreign material and oil.

**EXAMINE COOLANT PORT AREA OF MANIFOLD AND HEADS FOR PITTING.** If pitting is excessive, resurface or replace castings. Although some mechanics fill in the pits with epoxy, we recommend refinishing or replacing castings. Do not use RTV silicone to fill in the pits!

**INSTALL SIDE RAIL GASKETS DRY WITHOUT SEALERS.**

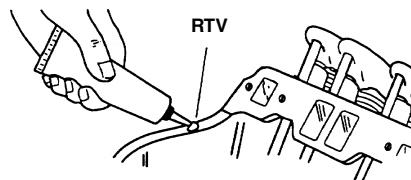

**CREATE MANIFOLD END SEALS** by applying a 1/4" dia. bead of RTV across front and rear ends of the block. Install manifold while RTV is still wet.

**INSTALL NEW BOLTS** with pre-applied sealer or wire brush old bolts and apply sealer.

- Continued -

**TIGHTEN BOLTS** slowly by hand, two at a time, across from each other, to seat manifold down evenly.

**TORQUE BOLTS.** Starting with the center bolts, and using a crisscross pattern, torque all bolts to 62 in. lbs, and then 115 in. lbs. Torque the 4 outer bolts to 18 ft. lbs.

### VALVE COVER GASKETS

To effectively seal this sophisticated engine application, FEL-PRO has included two PERMA-DRY molded rubber valve cover gaskets. For this application removal of the valve covers is necessary to perform a lower intake manifold gasket repair.

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV and oil. You may wish to use a degreaser. Also, clean oil return holes.

**CHECK COVER FLANGES** for flatness. Straighten stamped metal covers. Replace if severely distorted. Distorted cast aluminum or plastic covers are difficult to straighten and should be replaced.

**ATTACH AND ALIGN GASKET.**

**IMPORTANT:** The molded rubber silicone gaskets must be installed **DRY** without any chemical adhesive.

**PRESS GASKET IN VALVE COVER.**

**REINSTALL COVER TO ENGINE.** Torque securely to OEM specifications. Over-torquing can distort cover and cause leakage.

© 2007 Federal-Mogul Corporation  
Form No. I-2045 (Rev. 09/07)

Printed in U.S.A.