


INSTALLATION INSTRUCTIONS

CAUTION: Proper service and repair procedures are essential for the safe and reliable installation of chassis parts, and require experience and tools specially designed for the purpose. These parts **MUST** be installed by a qualified mechanic, otherwise an unsafe vehicle and/or personal injury could result.

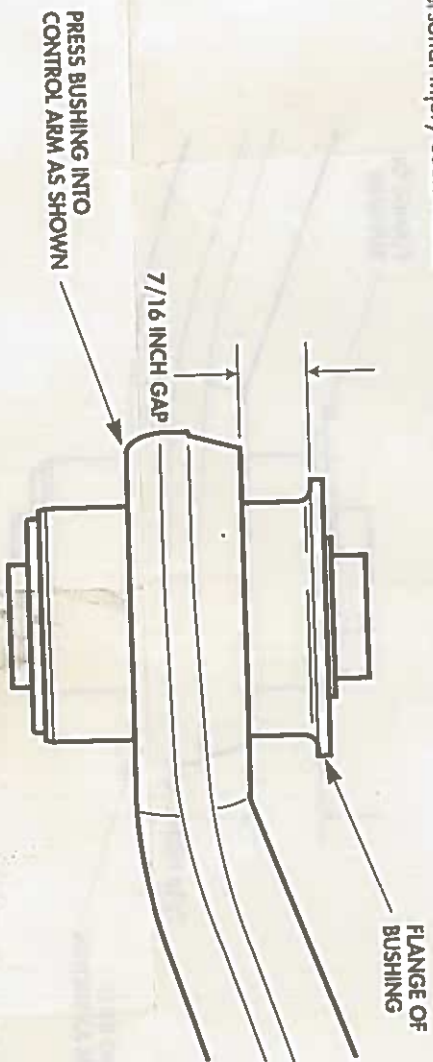

CAUTION: When pressing new bushing into lower control arm, be certain to maintain a 7/16 inch gap between bushing flange and arm surface, as illustrated.

NOTE: The parts in this kit are designed to replace the worn or non-functioning original equipment parts in the vehicle as produced by the car factory. These parts are not designed for installation on vehicles where the suspension and/or steering systems have been modified for racing, competition, or any other purpose.

© COPYRIGHT 1995 / NOVEMBER, 1995 / UTHO U.S.A.

Form 4180

Form 4180